


DGD1008



QUADBRID 8CH HD CCTV DVR

FEATURES


Free P2P Cloud EaZy Networking*

- Cloud EaZy Networking available to connect this device to Internet automatically in three steps with our free mobile app, EagleEyes.
- The "Buddy" feature to share the device access permission to other people.
- Device login / out notifications reported.




Quadbrid Video Input

- Supports Analog HD / TVI / CVI / 960H video input

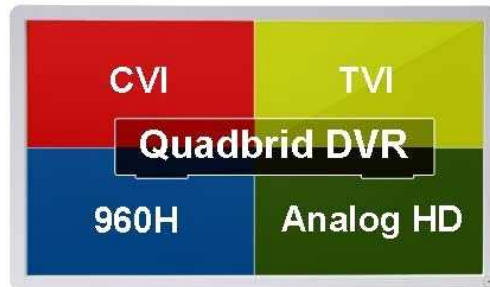

Spot Monitor

- In addition to the main display via the HDMI output, you can assign a secondary display to show live view, call monitor or event monitor.

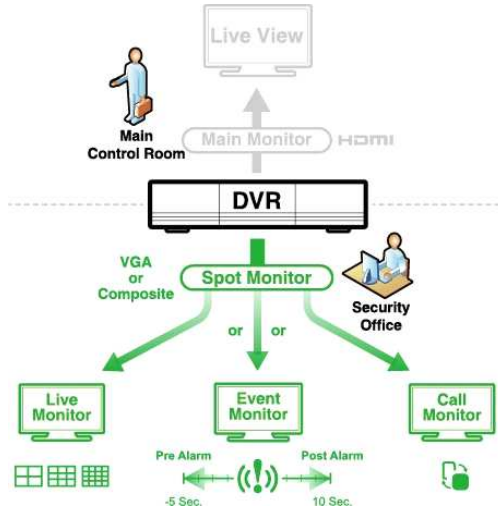

Push Status -

Active Event Notification with EagleEyes App

- Push Status to send instant notifications for system events, such as video loss or HDD data removal.



Video Backup

- Regular backup could be configured to automatically copy video footages to the specified location (USB drive or FTP) at the specified time.

Remote Surveillance

- Fully compatible with iOS and Android devices, and Internet Explorer on Windows operating system
- CMS Lite for 32 devices central management
- Applicable also to Apple's media player, QuickTime.

* EaZy Networking is a free P2P cloud service to connect AVTECH devices to the Internet automatically by plug-and-play, enabling you to check the live view via your mobile device or laptop at anytime (in 64 kbps).

➤ SPECIFICATIONS

❑ Video		
Video System	NTSC / PAL (auto detection)	
Video Compression Format	H.264	
Video Signal	Analog HD / TVI / CVI / 960H	
Video Input	8 channels (Composite video signal 1 Vp-p 75Ω BNC)	
Video Output	BNC	YES (Spot Monitor supported)
	VGA	YES
	HDMI	YES
Video Resolution	1080P / 720P / QHD / 960H / Frame / Field / CIF	
❑ Record & Backup		
Max. Recording Rate	1920 x 1080 @ 120 IPS <NTSC> / 100 IPS <PAL> 1280 x 720 @ 240 IPS <NTSC> / 200 IPS <PAL>	
Recording Mode	Manual / Timer / Motion / Remote	
Pre-alarm Recording	YES	
Playback Channel	8CH	
Quick Search	Time / Motion search mode	
Backup Device	USB 2.0 drive / Network	
Regular Backup	YES	
❑ Audio		
Audio Input	1 audio input	
Audio Output	1 audio output (Mono)	
❑ General		
Hard Disk Storage	10TB SATA HDD x 1	
SATA Interface	YES	
Image Quality Setting	SUPER BEST / BEST / HIGH / NORMAL	
USB Mouse Control	YES	
Motion Detection Area	16 × 12 grids per channel	
Motion Detection Sensitivity	3 adjustable parameters for accurate detection	
Event Notification	Push Status / FTP / E-Mail	
Picture Zoom	2X digital zoom	
IR Remote Control	YES (IR receiver built-in)	
Key Lock (Password Protection)	YES	
User Level	4 user levels for different access privilege	
Video Loss Detection	YES	
RS485	YES	
Camera Title	Supports up to 25 letters	
Video Adjustable	Hue / Saturation / Contrast / Brightness	
Date Display Format	YY/MM/DD, DD/MM/YY & MM/DD/YY	
Daylight Saving	YES	
Power Source (±10%)	DC12V / 2A	
Operating Temperature	10°C ~ 40°C (50°F ~104°F)	
Operating Humidity	10% ~ 85%	
Dimensions (±10%)**	260(L) x 48(H) x 235.7(D)	
Net Weight (kg)	1.2	

SPECIFICATIONS

Network

Ethernet	10/100 Base-T. Supports remote control and live view via Ethernet
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS

Remote Surveillance from PC

Compatible Operating System	Windows & MAC
Compatible Program	Web Browser: Internet Explorer, Google Chrome & Safari
	CMS Lite: 32CH central management software for Windows OS
	QuickTime: For both Windows and MAC operating systems
Max. online users	20
Web Transmitting Compression Format	H.264
Network Live Audio	YES
Remote Independent Operation	YES
Remote Event Download & Playback	YES

Mobile Surveillance

App	EagleEyes
Compatible Devices	iOS & Android devices
Push Status	YES

Others

EaZy Networking	YES
Spot Monitor Setup	Call Monitor / Event Monitor / Live Monitor (Composite)
DCCS Support	YES
AVTECH Free DDNS service	YES
Privacy Mask	YES
Multiplex Operation	Live display / record / playback / backup / network operations
System Recovery	System auto recovery after power failure
Optional Peripherals	HDMI Matrix (HDM02) / USB Joystick (AVX102)

* The specifications are subject to change without notice.

** Dimensional tolerance: ±5mm

REAR PANEL

